


D60-044-90-DC

Industrial L2 PRO Gigabit PoE Switch
w/12/24v to 56VDC step up for Solar Rigs

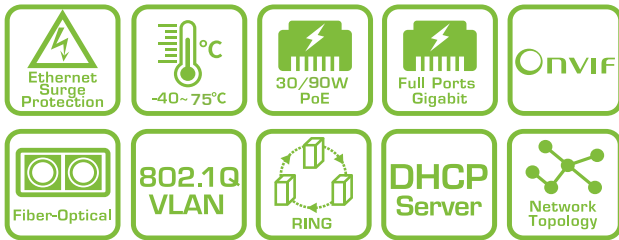


The D60-044-90-DC is an Industrial PRO L2 PoE Switches are designed with 6KV Ethernet port surge protection and harden-graded standard to operate between -40°C and 75°C for harsh weather conditions. They enable outdoor connections of PoE PDs to the network such as outdoor IP cameras, wireless APs, and other outdoor industrial applications.

The D60-044-90-DC provides multi-port Gigabit PoE (10M/100M/1G) delivering data and power to PoE PDs over a single network cable and additional SFP transceiver slots for flexible uplink. The D60 series has three sub models classified as power source equipment (PSE) and provide PoE budget up to 90W per port.

Besides general functions of L2 plus & basic L3 switch such as QoS, security, spanning tree, cable length measurement, and SNMP v1/v2c/v3, a dedicated web graphic user interface of IP surveillance is easy to configure and manage IP device. It automatically generates network topology maps, cable diagnostic, and PoE management.

Features

- Layer 2 Switch
 - 802.1d (STP), 802.1w (RSTP), 802.1s (MSTP)
 - Loop protection
 - SNMP v1/v2c/v3
 - QoS
 - VLAN
 - Ethernet cable length measurement
 - DHCP Server
- Network Topology System
 - Automatic discovery for ONVIF camera
 - Generates camera topology map automatically
 - Cable diagnostic & reboot camera remotely
 - PoE management
 - Topology view / Floor view / Google map
 - Monitor / Configure / Manage ONVIF camera thru web
- Flexible SFP transceiver ports for uplink
- Operating temperature between -40°C and 75°C
- Compliant IEEE 802.3 at / bt POH
- 90W PoE per port (D60-044-90-DC)
- Supports 10/100/1000Mbps data rates
- 6KV PoE surge protection
- IEEE 802.3az Energy Efficient Ethernet standard for green power

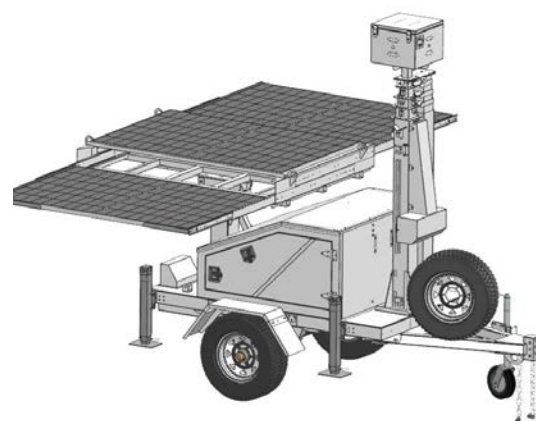

Device List

Show 10 entries


Status	Device Type	Model Name	Device Name	MAC	IP Address
Online	PoESW	H60-084-30-250	H60-8p @ 203 name	68:8D:B6:00:CB:00	192.168.10.203
Online	PoESW	H60-084-30-250	H60-8p @ 209 name	68:8D:B6:00:D1:00	192.168.10.209
Online	IPMX	M6000-AIW	M6000-AIW	68:8D:B6:01:E1:B1	192.168.10.165
Online	IP Camera	SNC-VB635	Sony	D8:D4:3C:DD:F5:C7	192.168.10.122
Online	IP Camera	WV-S1131	Panasonic_WV-S1131	BC:C3:42:71:79:D0	192.168.10.104
Online	IPSG	SD-504	SD-504	68:8D:B6:00:00:01	192.168.10.108
Online	PC	General Computer	FC2564	00:50:56:2D:FA:AC	192.168.10.201
Online	Others	Unknown model	Unknown name	04:D4:C4:2C:B5:EC	192.168.10.1
Online	Others	Unknown model	Unknown name	94:C6:91:5F:9E:EA	192.168.10.180
Online	PC	General Computer	MIS-TEMP-NB4	A0:A8:CD:26:FE:FD	192.168.10.192

Showing 1 to 10 of 29 entries

Previous 1 2 3 Next

[Edit](#)

Topology View

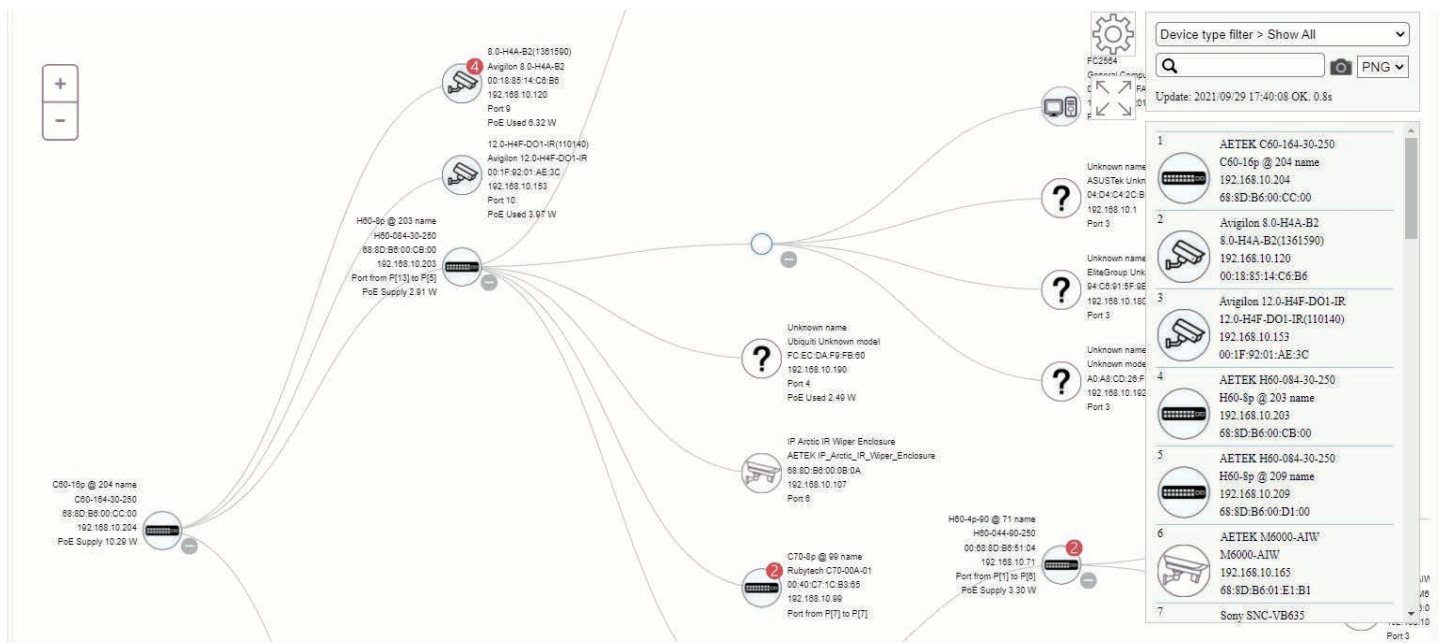

Device Dashboard

The device dashboard for the selected IP camera (12.0-H4F-DO1-IR) provides the following information:

- Device Type:** IP Cameras
- Device Name:** 12.0-H4F-DO1-IR
- Model Name:** 12.0-H4F-DO1-IR
- MAC Address:** 00:1F:92:01:AE:3C
- IP Address:** 192.168.10.153
- Http Port:** 80
- PoE Used:** 4.21 W

Navigation options include Login, Diagnostics, PoE Reboot, Dashboard, Notification, and Monitor.

Floor Map View

Device Dashboard

Device Type: PoE Switches
 Device Name: H60-4p-90 @ 73 name
 Model Name: H60-044-90-250
 MAC Address: 00:E0:4C:51:04:0A
 IP Address: 192.168.10.73
 Http Port: 80
 PoE Supply: 0 W
 API Account: admin73
 API Password: passwd73

Buttons: Close, Apply, Login, Upgrade, PoE Config, Diagnostics, Dashboard, Notification

Device List:

ID	Device Name	MAC Address	IP Address	Status
1	AETEK C60-164-30-250 C60-16p @ 204 name	192.168.10.204	68:8D:B6:00:CC:00	✗
2	Avigilon 8.0-H4A-B2 8.0-H4A-B2(1361590)	192.168.10.120	00:18:85:14:C6:B6	✗
3	Avigilon 12.0-H4F-DO1-IR 12.0-H4F-DO1-IR(110140)	192.168.10.153	00:1F:92:01:AE:3C	✗
4	AETEK H60-084-30-250 H60-Sp @ 203 name	192.168.10.203	68:8D:B6:00:CB:00	✗
5	AETEK H60-084-30-250 H60-Sp @ 209 name	192.168.10.209	68:8D:B6:00:D1:00	✗
6	AETEK M6000-AIW M6000-AIW	192.168.10.165		✗

Update: 2021/09/29 17:44:22 OK. 0.7s

Google Map View

Device Dashboard

Device Type: PoE Switches
 Device Name: H60-8p @ 203 name
 Model Name: H60-084-30-250
 MAC Address: 68:8D:B6:00:CB:00
 IP Address: 192.168.10.203
 Http Port: 80
 PoE Supply: 2.54 W
 API Account: admin203
 API Password: passwd203

Buttons: Close, Apply, Upgrade, PoE Config, Dashboard, Notification

Device List:

ID	Device Name	MAC Address	IP Address	Status
1	AETEK C60-164-30-250 C60-16p @ 204 name	192.168.10.204	68:8D:B6:00:CC:00	✗
2	Avigilon 8.0-H4A-B2 8.0-H4A-B2(1361590)	192.168.10.120	00:18:85:14:C6:B6	✗
3	Avigilon 12.0-H4F-DO1-IR 12.0-H4F-DO1-IR(110140)	192.168.10.153	00:1F:92:01:AE:3C	✗
4	AETEK H60-084-30-250 H60-Sp @ 203 name	192.168.10.203	68:8D:B6:00:CB:00	✗
5	AETEK H60-084-30-250 H60-Sp @ 209 name	192.168.10.209	68:8D:B6:00:D1:00	✗
6	AETEK M6000-AIW M6000-AIW	192.168.10.165		✗

Update: 2021/09/29 17:48:45 OK. 1.4s

Cable Diagnostics

Diagnostics

Device Type: IP Cameras
 Device Name: 12.0-H4F-DO1-IR(110140)
 Model Name: 12.0-H4F-DO1-IR
 MAC Address: 00:1F:92:01:AE:3C
 IP Address: 192.168.10.153

Icon	Diagnostic
1	AETEK C60-164-30-250 C60-16p @ 204 name 192.168.10.204 68:8D:B6:00:CC:00 Port: 10 <input checked="" type="checkbox"/> Connection ok Speed: 100M <input checked="" type="checkbox"/> Cable Status ok
3	Avigilon 12.0-H4F-DO1-IR 12.0-H4F-DO1-IR(110140) 192.168.10.153 00:1F:92:01:AE:3C

Buttons: Back

Device List:

ID	Device Name	MAC Address	IP Address	Status
1	AETEK C60-164-30-250 C60-16p @ 204 name	192.168.10.204	68:8D:B6:00:CC:00	✗
2	Avigilon 8.0-H4A-B2 8.0-H4A-B2(1361590)	192.168.10.120	00:18:85:14:C6:B6	✗
3	Avigilon 12.0-H4F-DO1-IR 12.0-H4F-DO1-IR(110140)	192.168.10.153	00:1F:92:01:AE:3C	✗
4	AETEK H60-084-30-250 H60-Sp @ 203 name	192.168.10.203	68:8D:B6:00:CB:00	✗
5	AETEK H60-084-30-250 H60-Sp @ 209 name	192.168.10.209	68:8D:B6:00:D1:00	✗
6	AETEK M6000-AIW M6000-AIW	192.168.10.165		✗
7	Sony SNC-VB635			✗

Update: 2021/09/29 17:40:48 OK. 0.7s

PoE Features

- IEEE802.3at (PoE+ 30W),bt 90W
- Max. allowed 90W per port
- Port status table

PoE Port Configuration						
Local Port	PD Class	Power Used	Current Used	Priority	Port Status	
1	-	0.00 [W]	0 [mA]	high	No PD detected	
2	-	0.00 [W]	0 [mA]	high	No PD detected	
3	-	0.00 [W]	0 [mA]	high	No PD detected	
4	class0	2.65 [W]	50 [mA]	high	on	
5	-	0.00 [W]	0 [mA]	high	No PD detected	
6	-	0.00 [W]	0 [mA]	high	No PD detected	
7	-	0.00 [W]	0 [mA]	high	No PD detected	
8	-	0.00 [W]	0 [mA]	high	No PD detected	
Total		2.00 [W]				





Specifications - Software

PoE Management	
Port Configuration	Supports per port PoE configuration function
PoE Scheduling	Supports per port PoE scheduling to turn on/off the PoE devices (PDs).
Auto-checking	Check the link status of PDs. Reboot PDs if there is no responses
Power Delay	The switch provides power to the PDs based on delay time when PoE switch boots up, in order to protect switch from misuse of the PDs.
IP Surveillance Graphical User Interface Specifications	
Automatic Discovery	Discover IP cameras complying ONVIF automatically
Topology View	Generate Topology maps to manage IP cameras
Floor view	It's easy to drag and drop PoE devices and help you to build smart workforces
Map view	Enhance efficiency to drag and drop devices and monitor surroundings on google map
Traffic Monitoring	Comprehensive chart to show traffic status
PoE Management	Reboot IP camera, Scheduling PoE on/off, alive checking, Power delay as PoE switch boots up, PoE configuration
Layer 2 Switching Specifications	
Spanning Tree Protocol	MAC Bridges Standard Spanning Tree (STP) 802.1d, Rapid Spanning Tree (RSTP) 802.1w, Multiple Spanning Tree (MSTP) 802.1s
IP/Mac Port Trunking	Link Aggregation Control Protocol (LACP) IEEE 802.3ad , Static aggregation.
VLAN	Supports up to 4K VLANs simultaneously (out of 4096 VLAN IDs), Port-based VLAN, 802.1Q tag-based VLAN
IGMP v1/v2 Snooping	IGMP limits bandwidth-intensive multicast traffic to only the requesters.
Layer 3 Switching Specifications	
DHCP Server	Assign IP to DHCP clients
Security	
IEEE 802.1X	IEEE802.1X: RADIUS authentication, authorization and accounting, MD5 hash, guest VLAN, single/multiple host mode and single/multiple sessions, Supports IGMP-RADIUS based 802.1X, Dynamic VLAN assignment
Port Security	Locks MAC addresses to ports, and limits the number of learned MAC address
Storm Control	Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port
Loop Protection	To prevent unknown unicast, broadcast and multicast loops in Layer 2 switching configurations.
RADIUS/ TACACS+	Supports RADIUS and TACACS+ authentication. Switch as a client
QoS	
Classification	Port based, 802.1p VLAN priority based
Bandwidth Control	Ingress policer, Egress shaping and rate control, Per port
Management software	
Port Mirroring	Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to N-1 (N is Switch's Ports) ports can be mirrored to single destination port. A single session is supported.
IEEE 802.1ab (LLDP)	Used by network devices for advertising their identities, capabilities, and neighbors on an IEEE 802ab local area network, Support LLDP-MED extensions
Web GUI Interface	Built-in switch configuration utility for browser-based device configuration
SNMP	SNMP version1, 2c, 3
Flow Control	The IEEE 802.3x standard for monitoring high speed switched networks. It gives complete visibility into the use of networks enabling performance optimization, accounting/billing for usage, and defense against security threats
Firmware Upgrade	Web browser upgrade HTTP and TFTP
NTP	Network Time Protocol (NTP) is a networking protocol for clock synchronization between computer systems over packet-switched
Other Management	System, HTTP, DHCP Client, Cable Diagnostics, Syslog, IPV4/IPV6 Management, SSH, Telnet

Specifications

		D60-044-90-DC		
Networking Specifications				
Total Gigabit Ports		8		
Gigabit PoE Ports (10M/100M/1G)		4 x 90W bt / PoH		
SFP Slots (100M/1G)		2		
Gigabit Ports (RJ45)		2		
Forwarding Capacity		11.904Mpps		
Mac Table		8 k		
Jumbo Frames		9,216 Bytes		
Switching Capacity		16 Gbps		
Power Specifications				
Input Voltage		12VDC ~ 56VDC x2		
Output Voltage Range / per PoE Port		PoE IEEE 802.3af (Max. 15.4W) output PoE+ IEEE 802.3at (Max. 30W) output bt/PoH PoE (Max. 90W) output		
PSE Power Pin Assignment		12(-),36(+),45(+),78(-)		
Switch power consumption (standby)		6.7W		
PoE Power Budget		24VDC:160W		
Surge Protection / each PoE Port		6KV		
Mechanical Specifications				
Dimensions (L x W x H)		72 x 122 x 150 mm		
Weight		0.86KG		
DI/DO		1/1		
Console		RJ45		
Reset Button		Yes		
Environmental Specifications				
Operating Temperature		-40°C~-75°C (-40°F~167°F)		
Storage Temperature		-40°C~-85°C (-40°F~185°F)		
Operating Humidity		5%~95% non-condensing		
Certifications				
EMC		CE,FCC,C-Tick		
Surge		EN61000-4-5	M2M Solar Certified	

Optional Accessories

SFP Modules			
 <p>SFP-ISX-X5 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • MMF • 0.5 km • -40°C ~85°C 	 <p>SFP-ISX-02 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • MMF • 2 km • -40°C ~85°C 	 <p>SFP-ILX-10 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • SMF • 10 km • -40°C ~85°C 	 <p>SFP-ILX-40 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • SMF • 40 km • -40°C ~85°C